
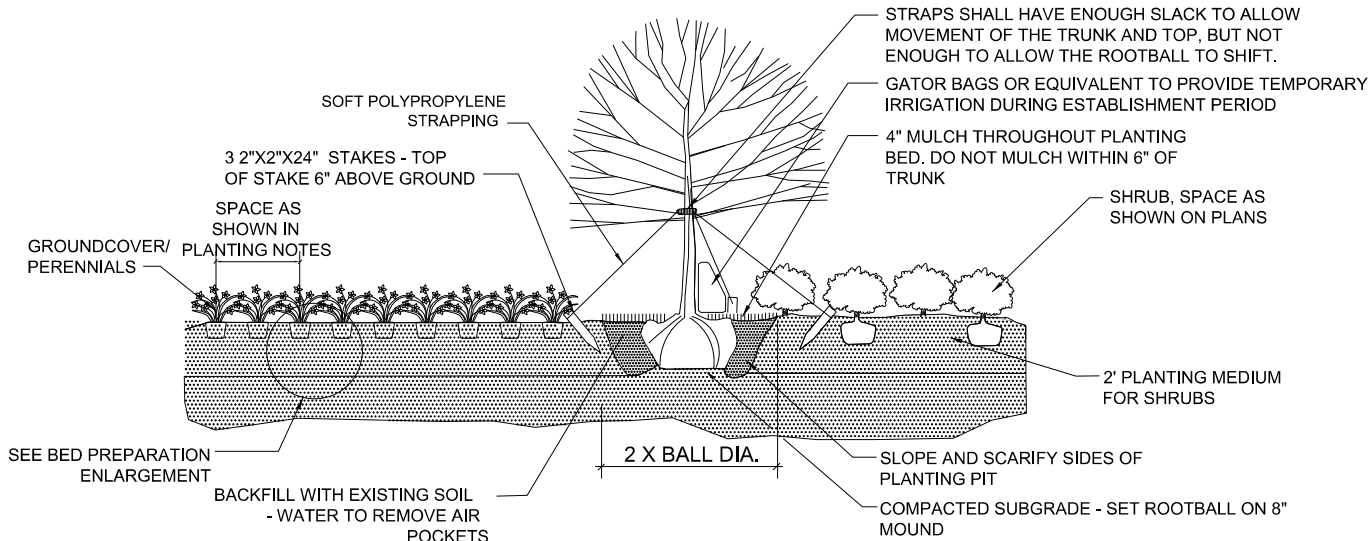
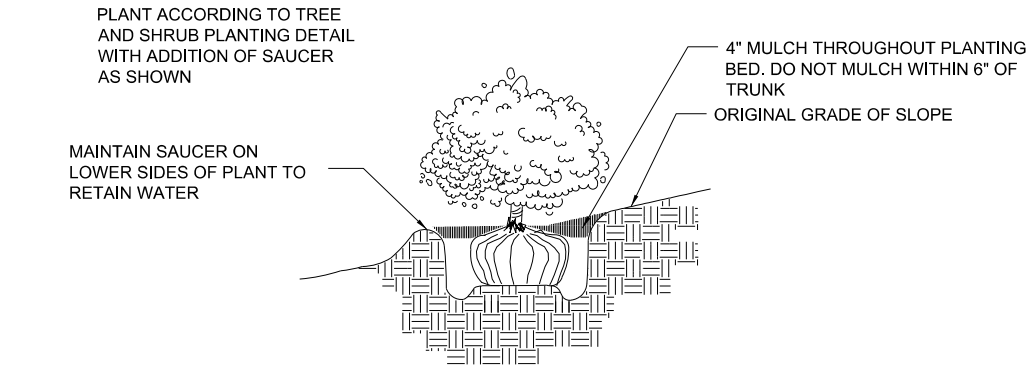
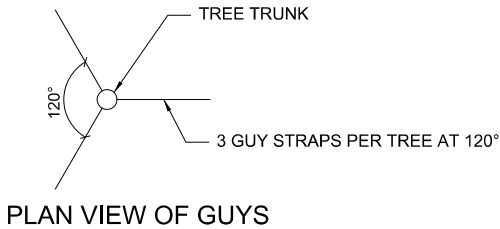



LANDSCAPE SPECIFICATIONS

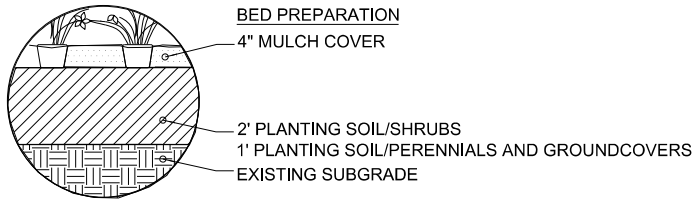


- NOTES:
- FLAG GUYING STRAPS WITH SURVEYOR TAPE
 - REMOVE CONTAINERS &/OR ROPE AND TOP 1/3 OF BURLAP
 - PRUNE SHRUBS AS REQUIRED TO MAINTAIN NATURAL FORM - DO NOT SHEAR PLANTS
 - APPROXIMATELY 1/8 OF ROOT BALL TO BE LOCATED ABOVE FINISHED GRADE
 - PLANTING PIT WIDTH FOR ALL TREES, SHRUBS, AND GROUNDCOVERS TO BE TWICE THE ROOT BALL WIDTH
 - ALL TREES ADJACENT TO WALKWAYS TO BE LIMBED UP TO A MINIMUM HEIGHT OF 7' ABOVE GRADE.
 - CONTRACTOR TO COMPLY WITH GDOT 702 SPECIFICATIONS FOR PLANTING AND MAINTENANCE
 - ALL SHRUBS TO BE INSTALLED AT LEAST 3' FROM CURB.
 - FOR PERMANENT GRASSING/EROSION CONTROL, USE NATIVE GRASS SEEDING TABLE 3 AND/OR HERBACEOUS PLANT SEEDING TABLE 4 FROM GDOT SPECIFICATION SECTION 700 - GRASSING.

ALL PLANT MATERIALS AREA TO CONFORM TO THE AMERICAN STANDARD FOR NURSERY STOCK, LATEST EDITION, AMERICAN NURSERY & LANDSCAPE ASSOCIATION.

2 SHRUB/TREE PLANTING DETAIL ON SLOPES

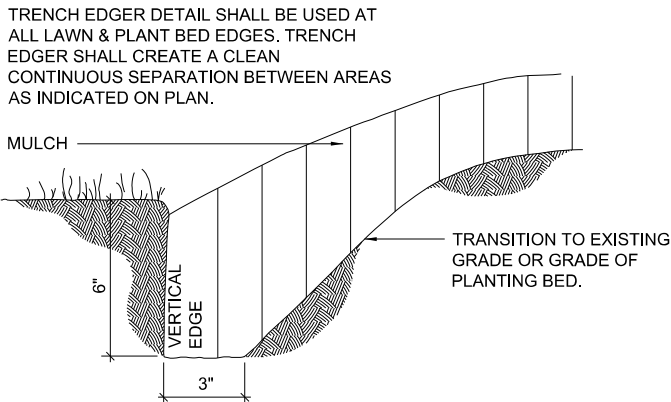

3 PLANTING BED EDGE DETAIL

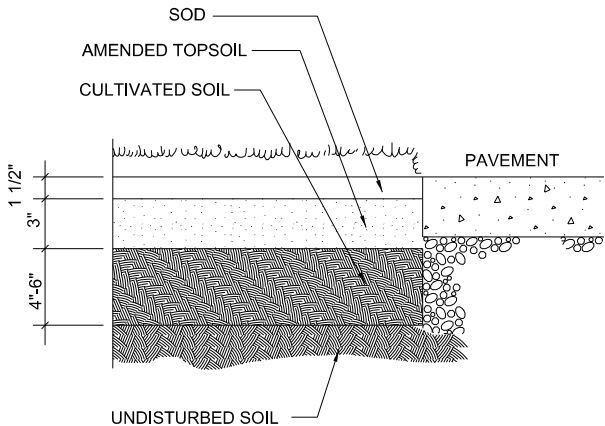

4 SOD PLANTING DETAIL



REVISION DATES		

STATE OF GEORGIA
DEPARTMENT OF TRANSPORTATION
OFFICE: INNOVATIVE DELIVERY
LANDSCAPING PLANS